

DESCRIPTION


The P-3248D-AS is a high cost-performance booster amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

| | |
|-----------------------------|---|
| Power Source | 100 - 240 V AC ~ 50/60 Hz or 24 V DC |
| Power Consumption (EN60065) | 99 W (AC operation at 1/8 maximum output without clip) |
| Rated Output | 480 W |
| Input | Line In : 0 dB*, 10 k Ω , balanced, screw terminal 100 V Line In : 40 dB*, 30 k Ω , unbalanced, screw terminal |
| Output | Speaker Out: Speaker output in screw type terminal Direct Line (selectable): 21 Ω (100 V) or 4 Ω Loop Out : 0 dB*, 10 k Ω , balanced, screw terminal |
| Control | Remote power control, screw terminal Remote Master volume bypass, screw terminal |
| S/N Ratio | Over 70 dB |
| Total Harmonic Distortion | Under 1% at 1 kHz, 1/3 rated power |
| Frequency Response | 50 - 20000 Hz |
| Tone Control | Bass: \pm 10 dB at 100 Hz Treble: \pm 10 dB at 10 kHz |
| Indicator | POWER, SIGNAL, PEAK |
| Operating Temperature | 0 °C to +40 °C |
| Ventilation | Fan Cooling |
| Finish | Panel: ABS Resin, Black Case: Steel Plate, Black |
| Dimensions | 420 (W) X 100.9 (H) X 351.3 (D) mm (16.54" X 3.97" X 13.83") |
| Weight | 5.2 kg (11.46 lb) |

APPEARANCE

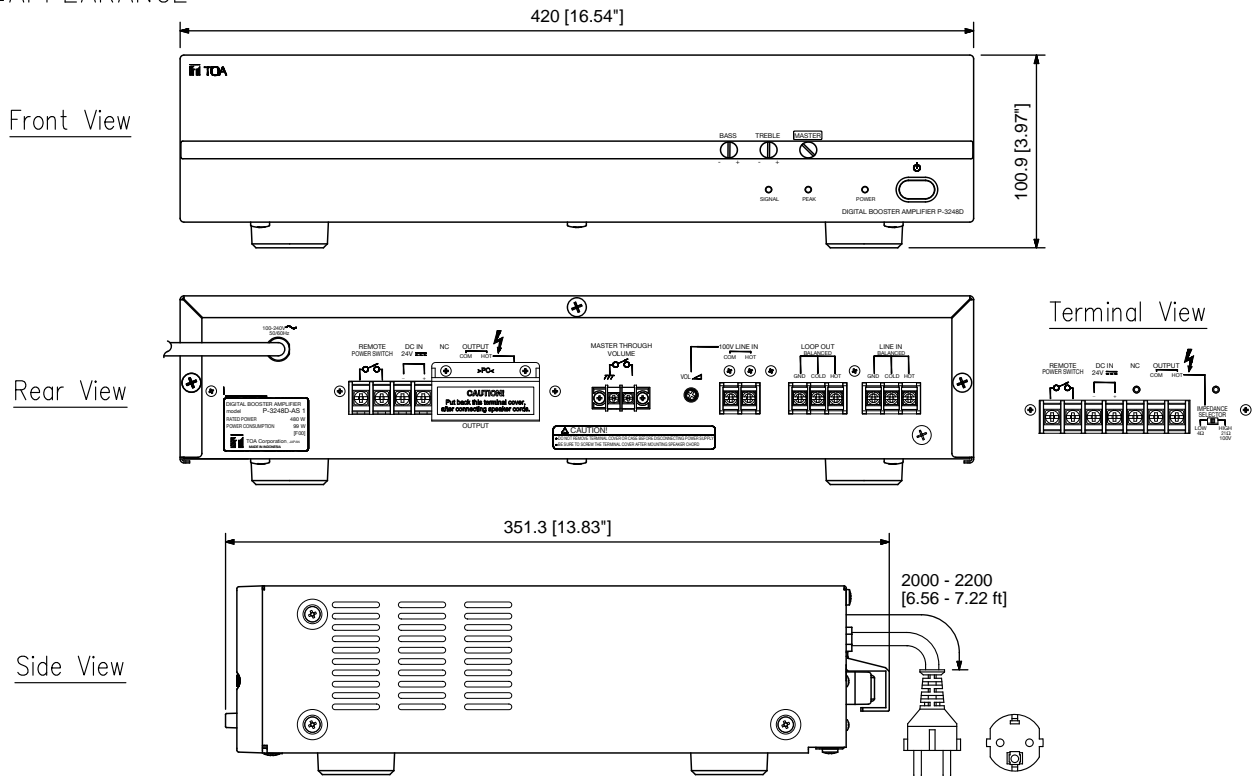

UNIT : mm SCALE : 1/4