

DESCRIPTION


The VP-1361(301H) power amplifier can be used for rack-mount application.

SPECIFICATIONS

\* 0 dB = 1 V

Power Source	AC: 230 V AC, 50/60 Hz DC: 24 V DC
Power Consumption	AC: 768 W (at rated output), 330 W (EN60065), 37 W (no-signal) DC: 20.9 A (at rated output), 0.5 A (no-signal)
Rated Output	360 W
Input	2 program inputs (parallel), 0 dB*, 20 kΩ, balanced 2 priority inputs (parallel), 0 dB*, 20 kΩ, balanced
Impedance	28 Ω (100 V)
S/N Ratio	80 dB or more
Total Harmonic Distortion	1 % or less (at rated output f = 1 kHz)
Frequency Response	80 Hz - 16 kHz, ±3 dB (at 1/3 rated output)
Ventilation	Fan cooling
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Aluminum, black, alumite
Dimensions	483.6 (W) × 132.6 (H) × 337.8 (D) mm (19.04" × 5.22" × 13.3")
Weight	16.6 kg (36.6 lb)
Accessory	Power cable (2 m (6.56 ft)) ---1, Removable terminal plug (2 pins) ---2, Removable terminal plug (3 pins) ---2, Removable terminal plug (5 pins) ---2, Fuse (6.3 A) ---1
Option	Fault detector: YA-1000A

APPEARANCE

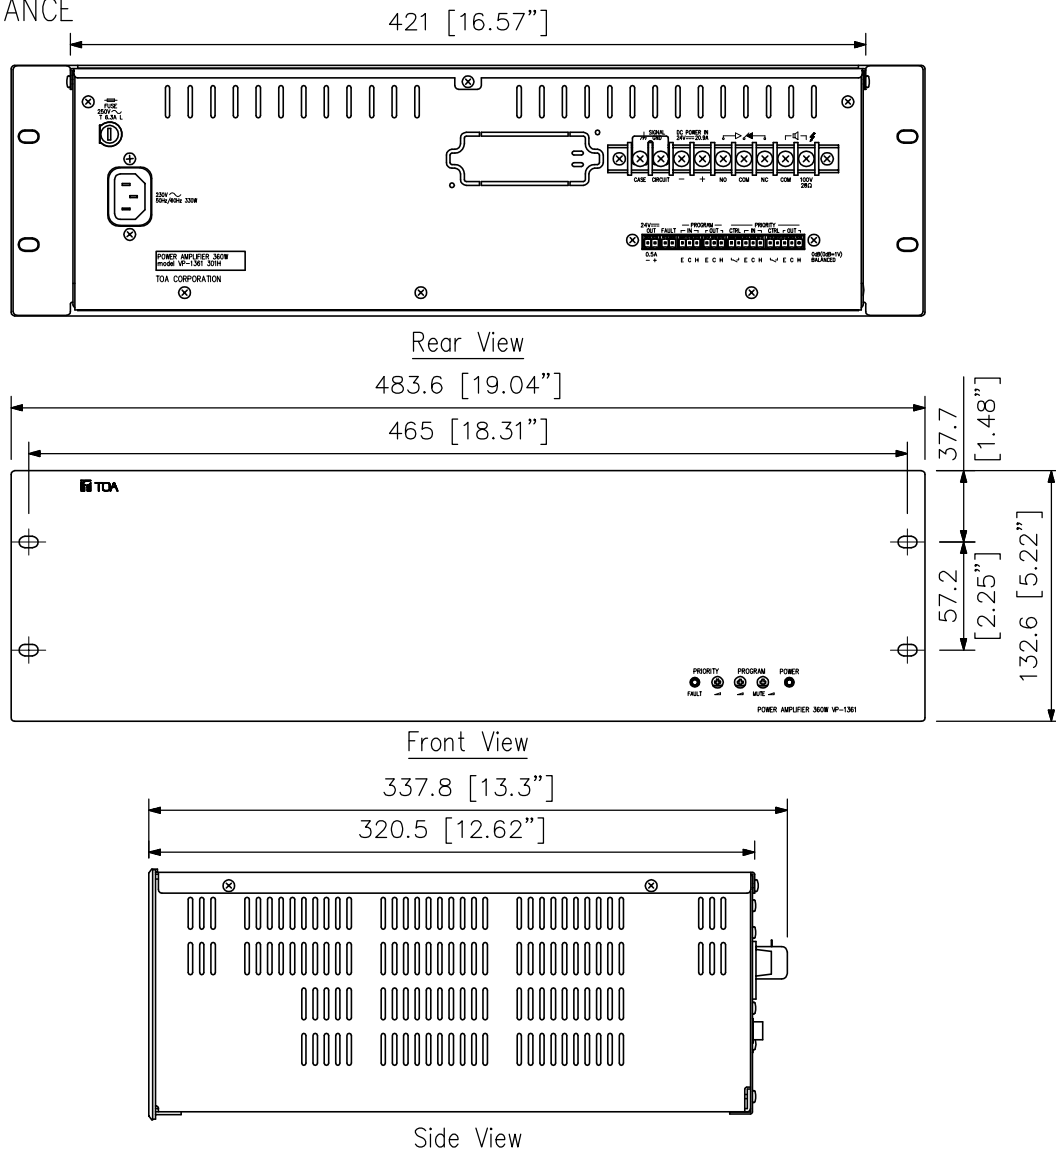

UNIT: mm SCALE: 1/4