

## DESCRIPTION


The A-2030D-AS is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

## SPECIFICATIONS

\* 0 dB = 1 V

|                             |   |
|-----------------------------|---|
| Power Source                | 220 - 240 V ~ 50/60Hz   |
| Rated Output                | 30 W  |
| Power Consumption (EN60065) | 12 W (AC operation at 1/8 maximum output without clip)  |
| Frequency Response          | 50 - 20,000 Hz, ±3dB  |
| Distortion                  | Under 1% at 1 kHz, 1/3 rated power  |
| Input                       | MIC 1 - 3: -60 dB*, 600Ω, balanced, 3P XLR<br>AUX 1 - 2: -20 dB*, 10 kΩ, unbalanced, RCA pin jack                   |
| Output                      | Speaker out: Balanced (floating)<br>High impedance: 330Ω, (100 V)<br>Rec out: 0 dB*, 600Ω, unbalanced, RCA pin jack |
| Phantom Power               | DC +21 V (MIC 1)  |
| S/N Ratio                   | Over 60 dB  |
| Tone Control                | Bass: ±10 dB at 100 Hz<br>Treble: ±10 dB at 10 kHz  |
| Muting                      | MIC 1: Mutes other input signals by 0 -30 dB attenuation  |
| Indicator                   | Power LED, Signal LED, Peak LED   |
| Finish                      | Panel: ABS resin, black<br>Case: Steel plate, black   |
| Dimensions                  | 420 (W) X 100.6 (H) X 280.3 (D) mm (16.54" X 3.96" X 11.04")  |
| Weight                      | 4.0 kg (8.88 lb)  |

## APPEARANCE

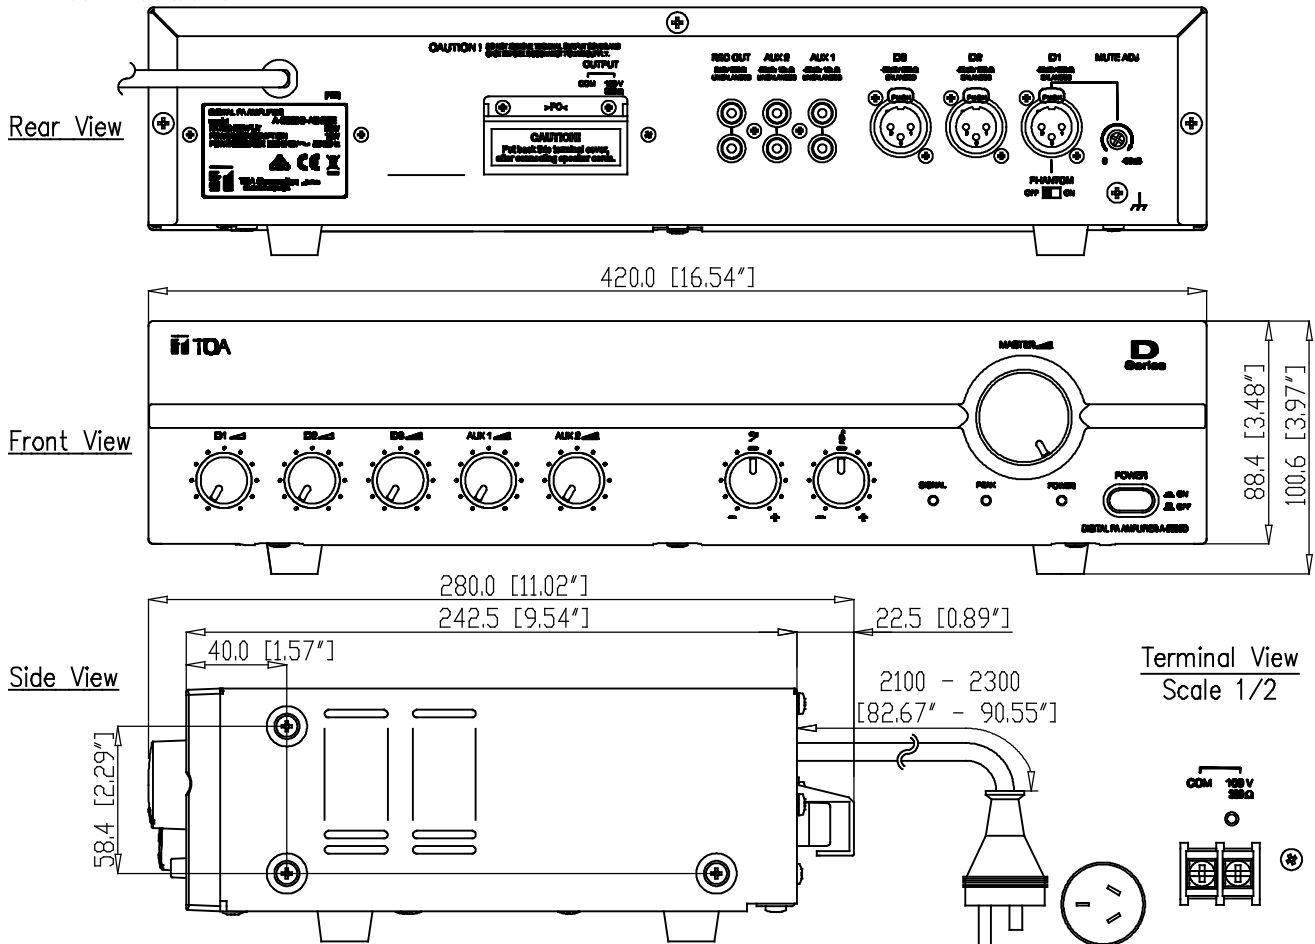

UNIT : mm SCALE : 1/3