

■DESCRIPTION

The FV-200RF-AS Microphone Receiver Panel is used to connect the RM-200M Remote Microphone to the FV-200 Series Emergency Public Address System. Up to 4 RM-200M can be connected.


■SPECIFICATIONS

\* 0 dB = 1 V


|   |   |
|---|---|
| Power Source                            | Usable power supply unit : FS-7000PS<br>24 V DC (operating range : 19.5 - 27 V), M3 screw terminal  |
| Current Consumption                     | 230 mA  |
| No. of Zone Groups in Speaker Selector  | Max. 10 (SS-2010, SS-1010R, SS-1010)  |
| Priority Control for Remote Micphone    | Last-in-1st-out priority / 1st-in-1st-out priority / individual priority / selectable   |
| Control Input                           | All call : 1 input, No-voltage make contact input, open voltage 24 V DC, short-circuit current : Under 5 mA, removable terminal block (2pins) |
| Control Output                          | SS Control : 55 outputs, No-voltage make contact output, removable terminal block (6 pins)  |
| Chime                                   | Ascending 4-note tone   |
| RF Link                                 |   |
| Audio Output                            | 0 dB*, unbalanced, Removable terminal block (2pins)   |
| RM Link                                 |   |
| Usable Remote microphone                | RM-200M Remote microphone extention unit : RM-210 (Max.4 unit)  |
| No. of Connectable to Remote Microphone | Max. 4 RM-200M  |
| Maximum Cable Distance                  | Total 800 m   |
| S/N Ratio                               | Over 60 dB  |
| Distortion                              | Under 1% (1kHz, rated output)   |
| LED Indicator                           | Power (Green), Error (Red)  |
| Operating Temperature                   | 0°C to +40°C  |
| Operating Humidity                      | Under 90% RH (no condensation)  |
| Finish                                  | Front Panel : Aluminum, black, alumite  |
| Dimensions                              | 482 (W) X 44 (H) X 335.2 (D) in mm  |
| Weight                                  | 2.8 kg  |
| Accessory                               | Removable terminal plug (2pins)...2, Removable terminal plug (3pins)...1, Removable terminal plug (6pins)...10, Instruction Manual...1        |

■ APPEARANCE

Rear View



Front View

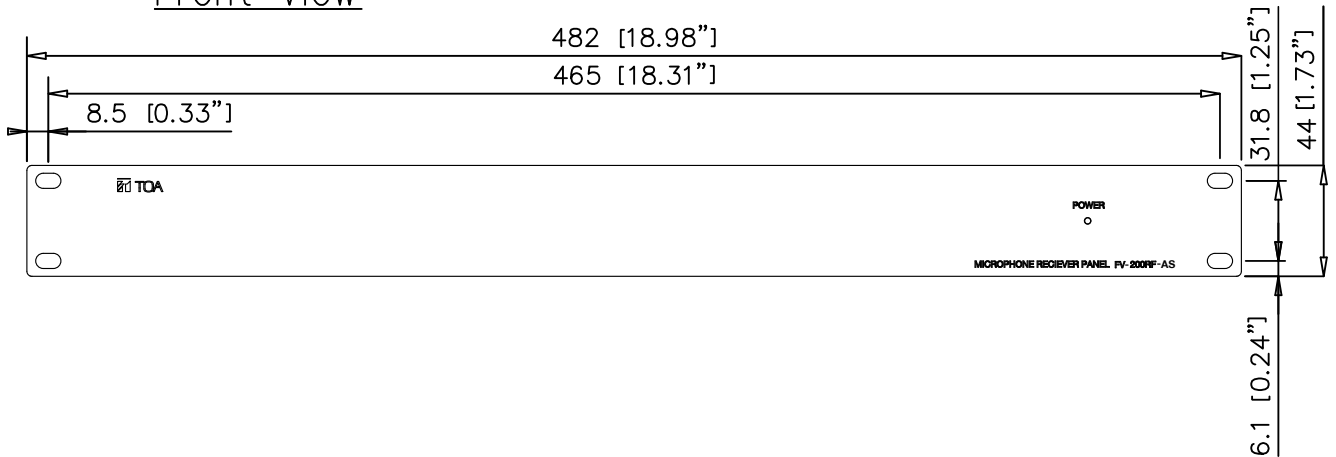

Right View

