

## ■ SPECIFICATIONS

|                           |   |
|---------------------------|---|
| Product Composition       | Wireless transmitter ...1 , Receiver ...1 ,Lavalier microphone ...1 |
| Frequency Range           | 506 - 937.5 MHz (*1), UHF   |
| Channel Selectable        | 4 channels  |
| Tunable Frequencies       | 25kHz Steps   |
| Pilot tone                | 32.768kHz   |
| Total Harmonic Distortion | <1% @ 1kHz  |
| Function                  | IR sync,Channel scan,Battery life information                       |
| Accessory                 | AC adapter (*2) ...1<br>Screw driver...1                            |

### Wireless transmitter

|                          |                                       |
|--------------------------|---------------------------------------|
| RF Carrier Power         | 10mW                                  |
| Audio Frequency Response | 50 - 15000 Hz                         |
| Audio input Level        | -6dBV (maximum), mic gain 0dB         |
| Modulation System        | PLL synthesizer                       |
| Battery                  | 1 AA size alkaline battery, 1.5 V     |
| Battery Life             | Approx. 10 hours                      |
| Indicator                | Battery status LED , 7 segments LED   |
| Finish                   | Resin , coating                       |
| Dimensions               | 62(W) x 100(H) x 25(D) mm (with clip) |
| Weight                   | approx. 85 g (with battery)           |

### Wireless receiver

|                              |   |
|------------------------------|---|
| Diversity Reception          | AC mains (supplied AC-DC adapter must be used)                                    |
| Sensitivity                  | 10uV at 45dBA S/N   |
| Squelch(SQ)                  | Tone SQ,Carrier SQ,Noise SQ   |
| Audio Frequency Response     | 50 - 15000Hz  |
| Audio Output Level (Maximum) | S4.04-RX Balanced (XLR socket) : -20dBu<br>Un-balanced (1/4" jack socket) : 10dBu |
| Power Supply                 | 11-18 VDC 300mA   |
| Dimensions                   | 215(W) x 39(H) x 102(D) mm (excluding antenna and BNC)                            |
| Weight                       | 480g  |

(\*1)




| Band | Frequency          |
|------|--------------------|
| B    | 720 - 758 MHz, UHF |
| C    | 785 - 832 MHz, UHF |
| D    | 836 - 866 MHz, UHF |
| E    | 671 - 701 MHz, UHF |
| F    | 633 - 671 MHz, UHF |
| G    | 603 - 633 MHz, UHF |
| H    | 576 - 603 MHz, UHF |
| K    | 902 - 938 MHz, UHF |

(\*2)



| Version | AC Adapter            |
|---------|-----------------------|
| G (UK)  | 220 - 230 V AC , 50Hz |
| E (ER)  | 230 V AC , 50Hz       |
| T (US)  | 120 V AC , 50Hz       |
| A (AS)  | 240 V AC , 50Hz       |
| R (US)  | 120 V AC , 60Hz       |
| C (CH)  | 220 V AC , 50Hz       |

■ APPEARANCE

Wireless Transmitter

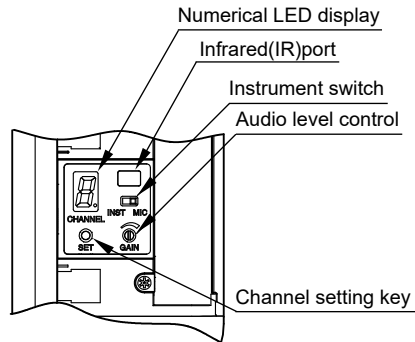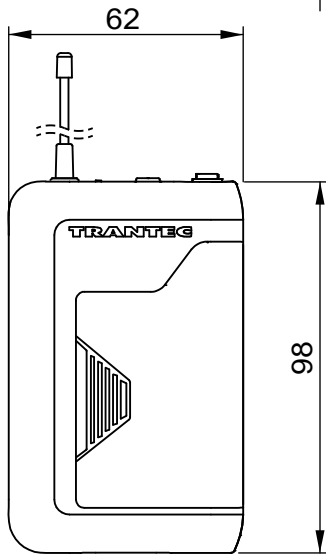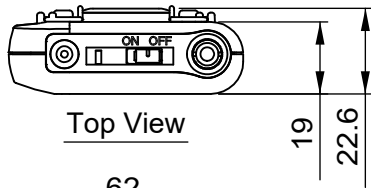


Inside of a battery cover


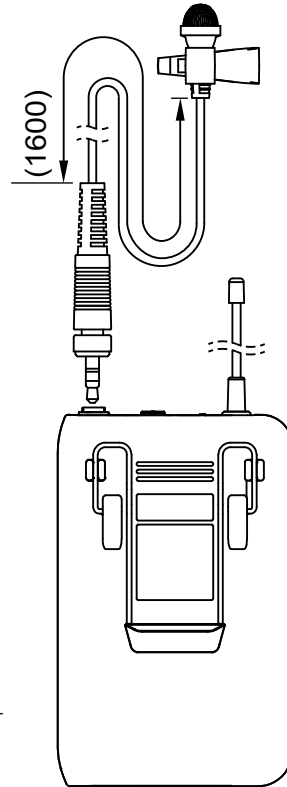


Wireless Tuner

Rear View

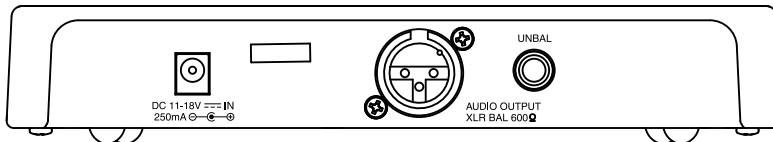

Top View

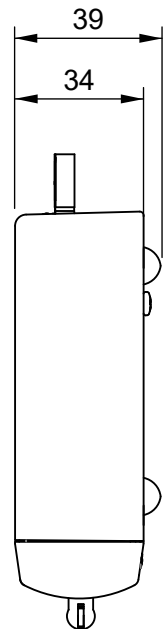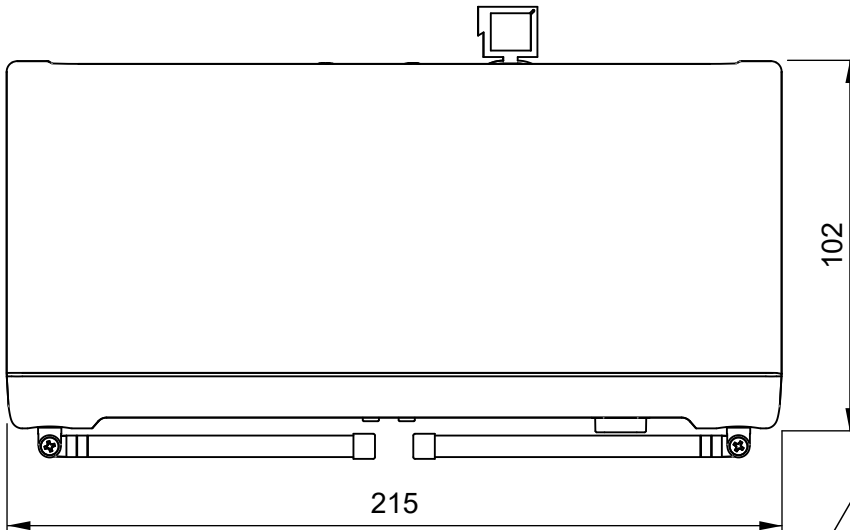

SideView

Front View

