

■DESCRIPTION


The TS-682L-AS is a Delegate unit for TOA Conference system, of which compact and lightweight design makes it easy to install and store. Placing the talk key in the ON position permits speech and disables the speaker to prevent feedback. If the talk key is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored. The TS-682L-AS delegate unit come with a long microphone as standard accessory.

■SPECIFICATIONS


\* 0 dB = 1 V

Power Source	36 V DC, 30 mA or less (supplied from the Central Unit TS-680-AS)
Output	Headphone/Recording: 32 Ω (headphone)/10 kΩ, -20 dB* (recording), unbalanced, mini jack (with Volume control) Internal speaker: 130 Ω, 200 mW (with Volume control)
Control	Talk key : Microphone, speaker on-off control by talk key Volume control: Headphone output and internal speaker volume adjustable
Microphone unit (Accessory)	Electret condenser microphone Directivity: Unidirectional Impedance: 1.8kΩ Sensitivity: -37dB (1KHz 0dB = 1V/Pa) Frequency response: 100Hz - 13 kHz Length : 518mm Weight: 105g (0.23 lb)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	ABS resin, black, paint
Dimensions	145.3 (W) × 70.7 (H) × 150.5 (D) mm (5.72" × 2.78" × 5.93") (Excluding microphone unit)
Weight	800 g (1.76 lb) (Excluding microphone unit)
Accessory	Long microphone unit.....1
Option	Extension cord: YR-780-2M, YR-780-10M


■ APPEARANCE

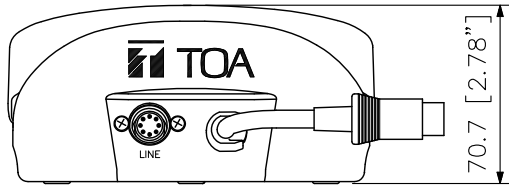


Rear View

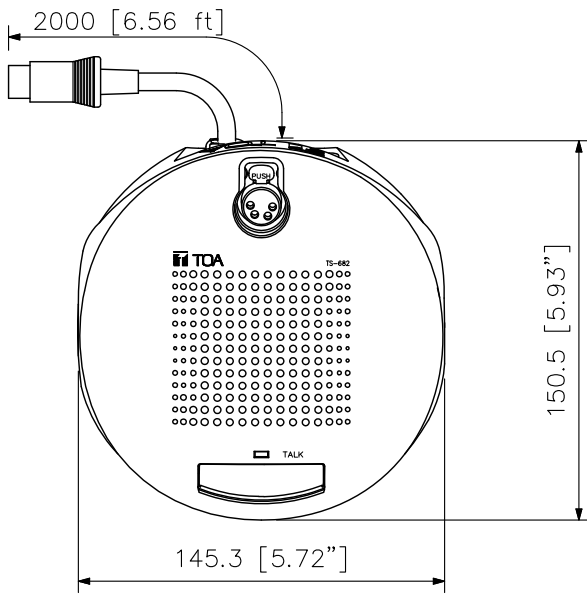

Top View

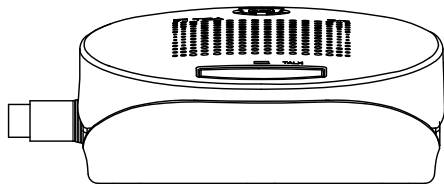

Front View

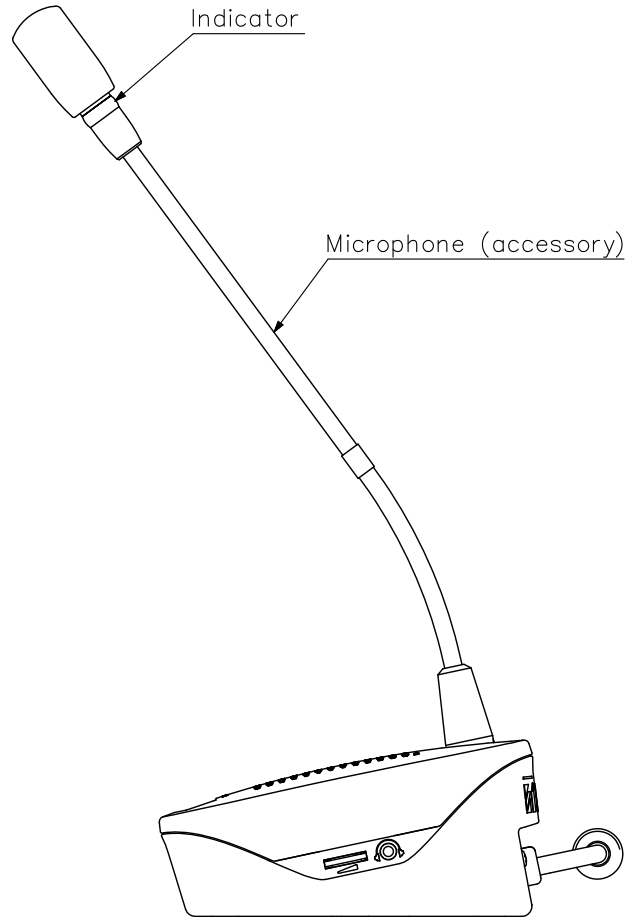

Side View

UNIT: mm SCALE: 1/3