

DESCRIPTION

The MP-210-AS monitor panel comes with a speaker and LED display, and allow of the overall operation of an equipment rack. Up to 10 amplifiers output levels can be selected and monitored.


SPECIFICATIONS

| | |
|---------------------|-------------------------------------------------------------------------|
| Power Requirements | 24 V DC |
| Current Consumption | 30 mA |
| Input | 10 zones high impedance level : 100V Line Level line : 40 dBV (100V) |
| Speaker Component | 30 x 70 mm cone speaker 6 W/ 8Ω |
| Monitor level | 6-point LED display |
| Control Panel | Channel selector switch, Volume control switch |
| Color | Front panel : Black, Chassis and case : natural SECC |
| Dimesions | 482 (W) x 44 (H) x 116.4 (D) mm (18.98"x1.73"x4.58") |
| Weight | Approx. 1.1 kg (2.43 lb) |
| Accessory | Removable terminal plug (2 pins)...10 |


Notes:

- o The design and specifications are subject to change without notice for improvement.


APPEARANCE



Rear View



Side View

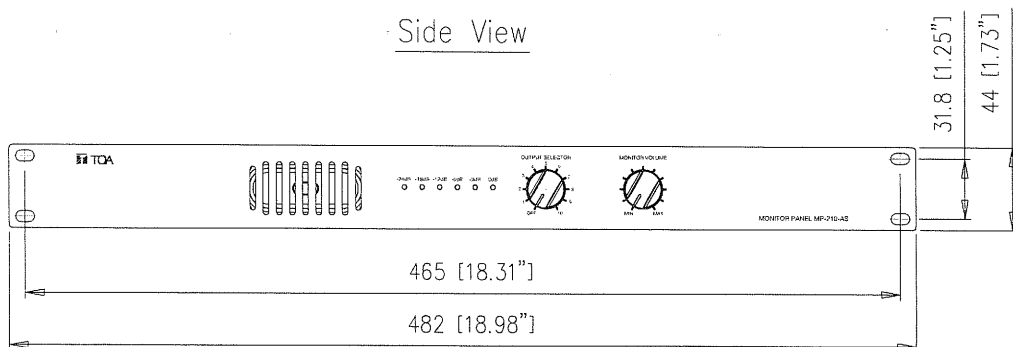

Front View