

DESCRIPTION


TOA speaker selector SS-1010R is a 10 zone BGM or 10 zone paging speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

SPECIFICATIONS


| | | |
|-----------------------|---|---|
| Voltage Source | 24 V DC | |
| Current Consumption | 0.4 A DC | |
| Inputs | 10 Inputs BGM / Paging | |
| | 1 Link as Input / Output | |
| Output | 10 Outputs with 3 wire R-H-C Each output max 480W | |
| Controls | Front | 10 BGM Selectors |
| | Rear | 1 All Call Selector for All Paging |
| | | 1-10 Paging Controls In All Paging Control In for All Paging |
| Indicator Led | 10 BGM Selector LEDs | |
| | 10 Paging Selector LEDs | |
| | 1 All Call LED | |
| Operating Temperature | 0°C to +40°C | |
| Finish | Front Panel : Aluminum Hair Line, Etching Black | |
| | Case : Steel Plate, Painting Black | |
| Dimensions | 420 (W) X 44 (H) X 320 (D) in mm | |
| Weight | 3.2 kg | |
| Accessories | 6P Connectors (12 Pcs) | |
| | 2P Connector (1 Pc) | |

APPEARANCE


Rear View

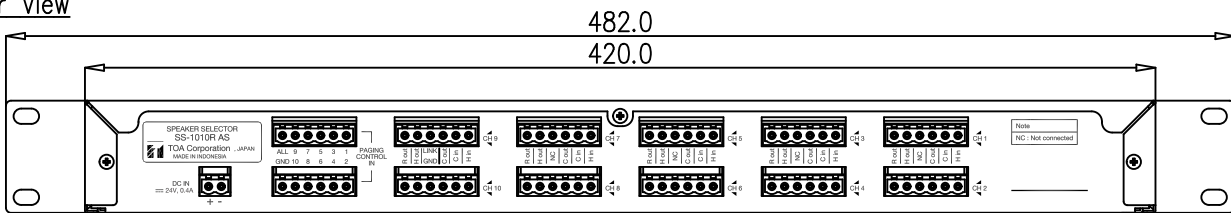

Front View

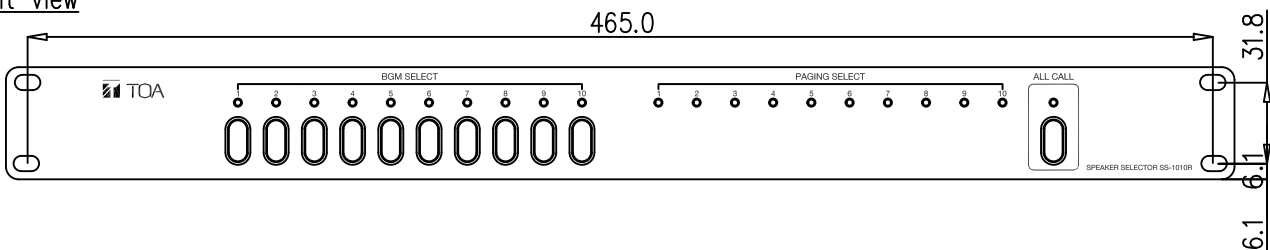

Side View

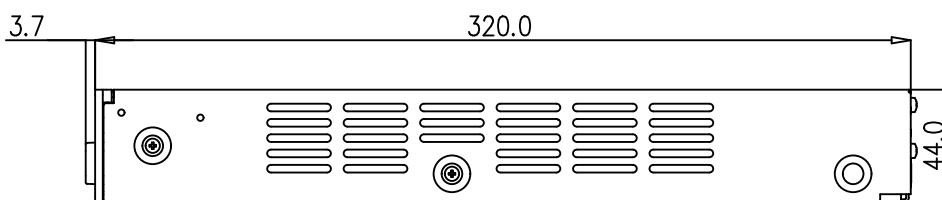

UNIT : mm SCALE : 1/3