

DESCRIPTION


The TOA WA-1830M-AS is a portable meeting amplifier that can accept up to two optional wireless tuner modules (WTU-4800).

SPECIFICATIONS


\* 0 dB = 1 V

Power Source	100-240 V AC, 50/60 Hz; DC : 12 V, 2.3 Ah ( Rechargeable Battery not included, Reference dimension battery :178 (W) × 60 (H) × 34 (D) mm)
Power Consumption	AC : 55 W (rated output), AC : 11 W (operation at EN60065)
Rated Output	AC : 30 W; DC : 10 W
Applicable Tuner Unit	WTU-4800 (Optional)
Frequency Response	50 Hz - 15 kHz, ±3 dB
Distortion	Under 5 % (rated output)
Input	Wired Mic : -45 dB*, 600 Ω, Unbalanced, 6.3 mm phone jack External Input : -20 dB*, 10 kΩ, Unbalanced, RCA jack
Output	External Speaker : 4 - 16 Ω/ over 30 W of rated input External Output : 0 dB*, 1 kΩ, Unbalanced, 6.3 mm phone jack
Other Feature	Internal or External Speaker selection switch
S/N Ratio	Over 60 dB (rated output)
Antenna	Built-in
Internal Speaker	2-way speaker system : 20 cm full-range speaker and tweeter
Mp3 player	Extension Type file is : MP3, WMA, WAV, AAC, FLAC. Max. supported storage size of the medium (stick) : 32GB. (FAT16/FAT32). Source : USB, SD/MMC, BLUETOOTH, FM, REC, AUX. We do not guarantee that its support all kinds of USB/SD.
Operating Temperature	-10 °C to +50 °C
Finish	ABS resin, Black
Dimensions	298 (W) × 460 (H) × 200 (D) mm
Weight	5.3 kg
Accessories	Power cord (YA-301) *1, Dust cover *1, Screw driver *1, Remote Control *1


APPEARANCE

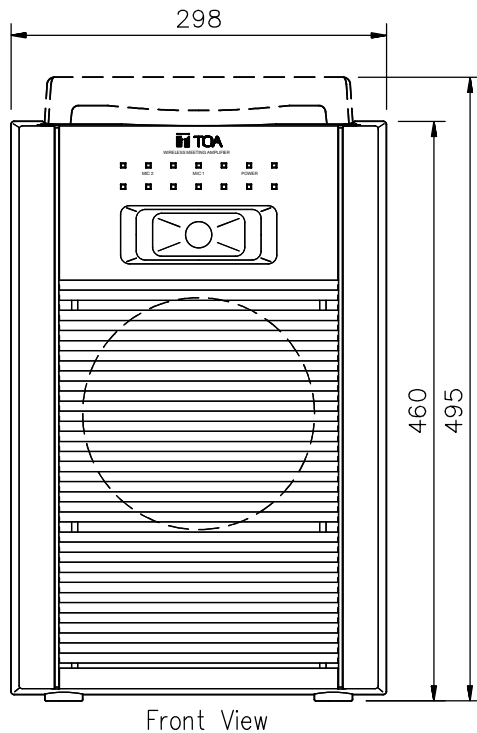


Front View

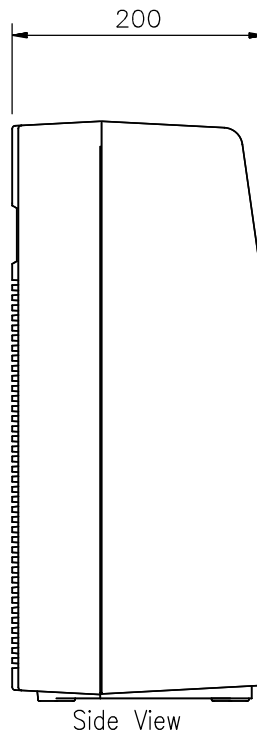


Side View

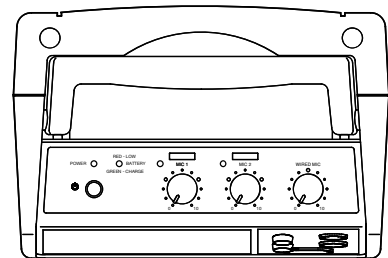

Top View

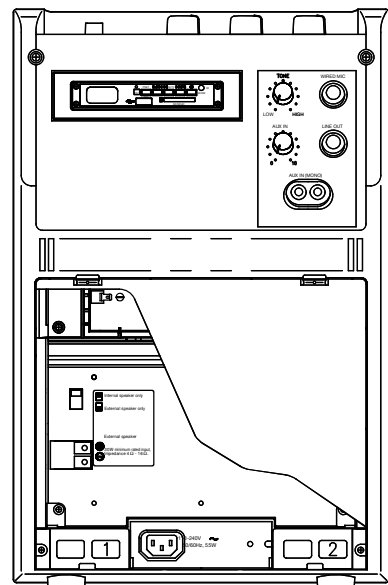

Rear View

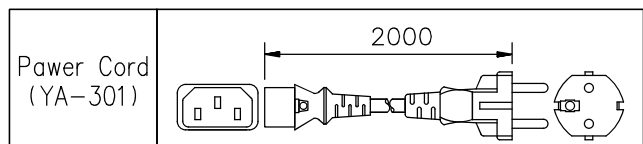

UNIT:mm SCALE:1/6