

DESCRIPTION


The TOA WA-1830M-AS is a portable meeting amplifier that can accept up to two optional wireless tuner modules (WTU-4800).

SPECIFICATIONS


\* 0 dB = 1 V

|                       |   |
|-----------------------|---|
| Power Source          | 100-240 V AC, 50/60 Hz; DC : 12 V, 2.3 Ah ( Rechargeable Battery not included, Reference dimension battery :178 (W) × 60 (H) × 34 (D) mm)   |
| Power Consumption     | AC : 55 W (rated output), AC : 11 W (operation at EN60065)  |
| Rated Output          | AC : 30 W; DC : 10 W  |
| Applicable Tuner Unit | WTU-4800 (Optional)   |
| Frequency Response    | 50 Hz - 15 kHz, ±3 dB   |
| Distortion            | Under 5 % (rated output)  |
| Input                 | Wired Mic : -45 dB*, 600 Ω, Unbalanced, 6.3 mm phone jack<br>External Input : -20 dB*, 10 kΩ, Unbalanced, RCA jack  |
| Output                | External Speaker : 4 - 16 Ω/ over 30 W of rated input<br>External Output : 0 dB*, 1 kΩ, Unbalanced, 6.3 mm phone jack   |
| Other Feature         | Internal or External Speaker selection switch   |
| S/N Ratio             | Over 60 dB (rated output)   |
| Antenna               | Built-in  |
| Internal Speaker      | 2-way speaker system : 20 cm full-range speaker and tweeter   |
| Mp3 player            | Extension Type file is : MP3, WMA, WAV, AAC, FLAC.<br>Max. supported storage size of the medium (stick) : 32GB. (FAT16/FAT32).<br>Source : USB, SD/MMC, BLUETOOTH, FM, REC, AUX.<br>We do not guarantee that its support all kinds of USB/SD. |
| Operating Temperature | -10 °C to +50 °C  |
| Finish                | ABS resin, Black  |
| Dimensions            | 298 (W) × 460 (H) × 200 (D) mm  |
| Weight                | 5.3 kg  |
| Accessories           | Power cord (YA-301) *1, Dust cover *1, Screw driver *1, Remote Control *1   |


APPEARANCE

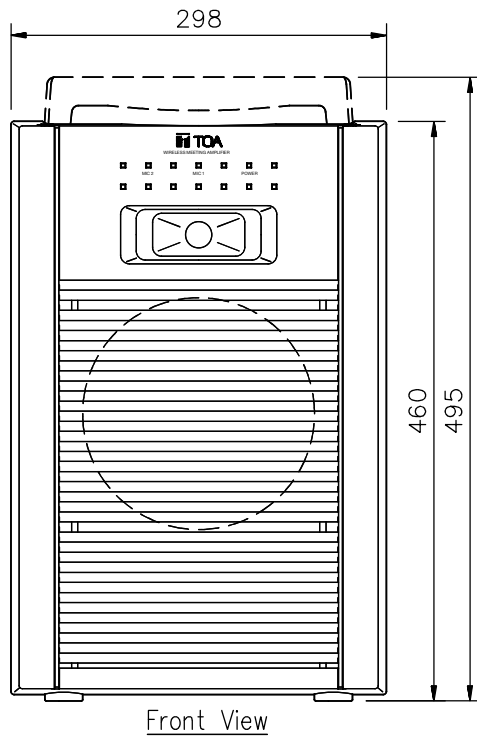


Front View

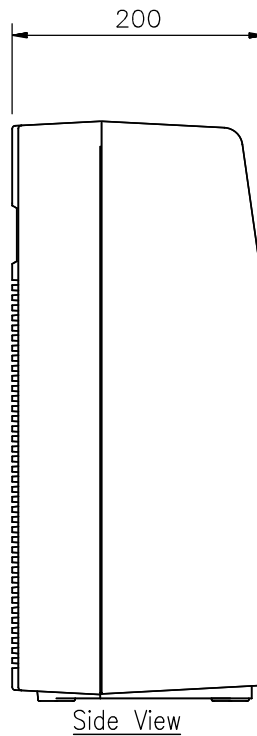


Side View

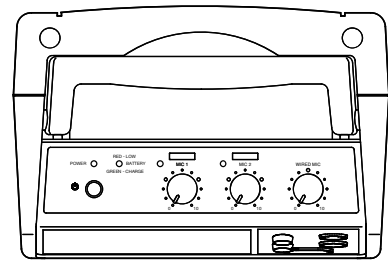

Top View

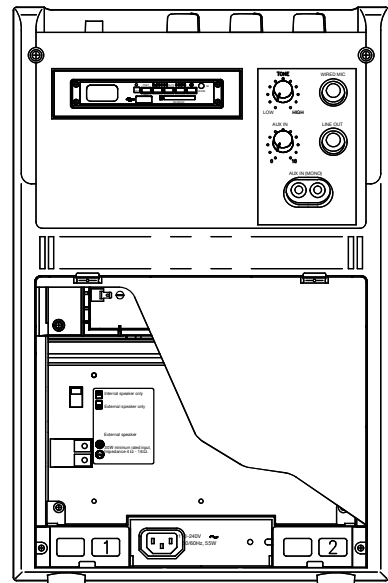

Rear View

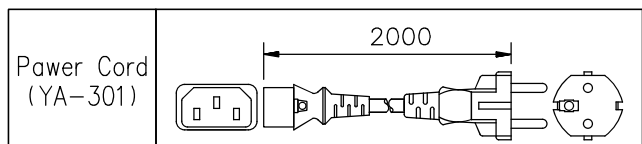

UNIT:mm SCALE:1/6