

### DESCRIPTION


This Master Station is designed to connect to the IP Intercom Exchange, and provides hands-free conversation of high sound quality. With its space-saving design, this Master Station features the same functions as the Standard Master Station. This station can be mounted to the wall using an optional YC-290 wall mounting bracket.

### SPECIFICATIONS

\* 0 dB = 1 V

Power Source	48 V DC (supplied from the IP intercom exchange (option))
Power Consumption	1.8 W (at rated), 2.4 W (max.)
Wiring Method	1 set of twisted pair cable
Transmission System	2 wire 160 kbps echo canceller transmission system
Signal Level	0 dB* or less
Speech Method	Hands-free conversation
Audio Frequency Range	300 Hz - 7 kHz
Transmission Range	Max. 1500 m (∅0.65 mm, Loop resistance 170 Ω)
Hands-free	Speaker: 5.7 cm cone-type, 0.6 W, 8 Ω Microphone: Omni-directional electret condenser microphone
Indication	Status lamp
Line Connecting Terminal	RJ11 modular jack
Installation Method	Desk/Surface mounted master station (When mounting to the wall, use the optional YC-290.)
Operating Temperature	0 °C to +40 °C
Operating Humidity	90 %RH or less (no condensation)
Finish	Body: ABS resin, gray
Dimensions	92 (W) x 195 (H) x 57.9 (D) mm
Weight	400 g
Accessory	Connection cord (3 m) ...1
Option	Wall mounting bracket: YC-290

### APPEARANCE



Top View



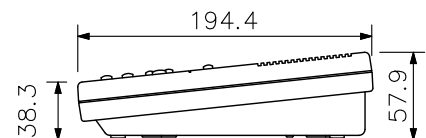



Figure of the desktop installation  
(scale: 1/5)

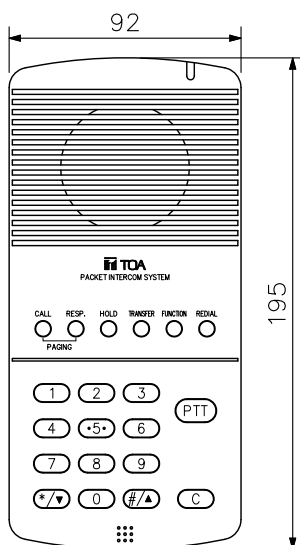

Front View

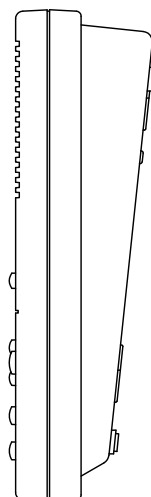

Side View

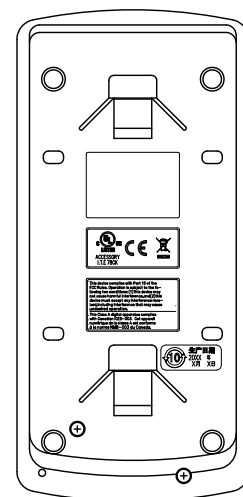

Rear View

UNIT:mm SCALE:1/3