


### DESCRIPTION

The TT-104B is a program timer that comes with 4 outputs and controls 4 different broadcasts. With use of an optional rack-mounting bracket, it can be mounted in an EIA Standard equipment (occupying 1 unit size).

### SPECIFICATIONS

Power Source	220 - 240 V AC, 50/60 Hz
Power Consumption	3 W
Displayed Contents	Day of the week, hour and minute
Programmable Item	Day of the week, hour, minute, output channel
Number of Channels	4 channels (A,B,C,D)
Output System	No-voltage (DRY) make contact (5-second pulse make output)
Output Capacity	24 V DC, 0.5 A
Output Terminal	M4 screw terminal, distance between barriers: 9 mm (0.35")
Program Capacity	30 steps per channel
Clock Accuracy	±5 seconds per month (25 °C (77 °F))
Power Outage Protection Period	100 hours
Operating Temperature	0 °C to +50 °C (32 °F to 122 °F)
Finish	Panel: Aluminum, black, 30 % gloss, paint Case: Pre-coated steel plate, black
Dimensions	420 (W) × 47.5 (H) × 246.5 (D) mm (16.54" × 1.87" × 9.7")
Weight	2.5 kg (5.51 lb)
Option	Rack-mounting bracket: MB-15B


### APPEARANCE

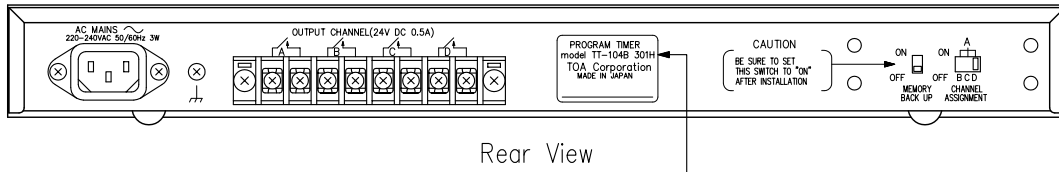

Rear View

Other product versions 302H and 313H and 315H are available depending on the power cord type.

MODEL	301H	302H	313H	315H
AC plug				

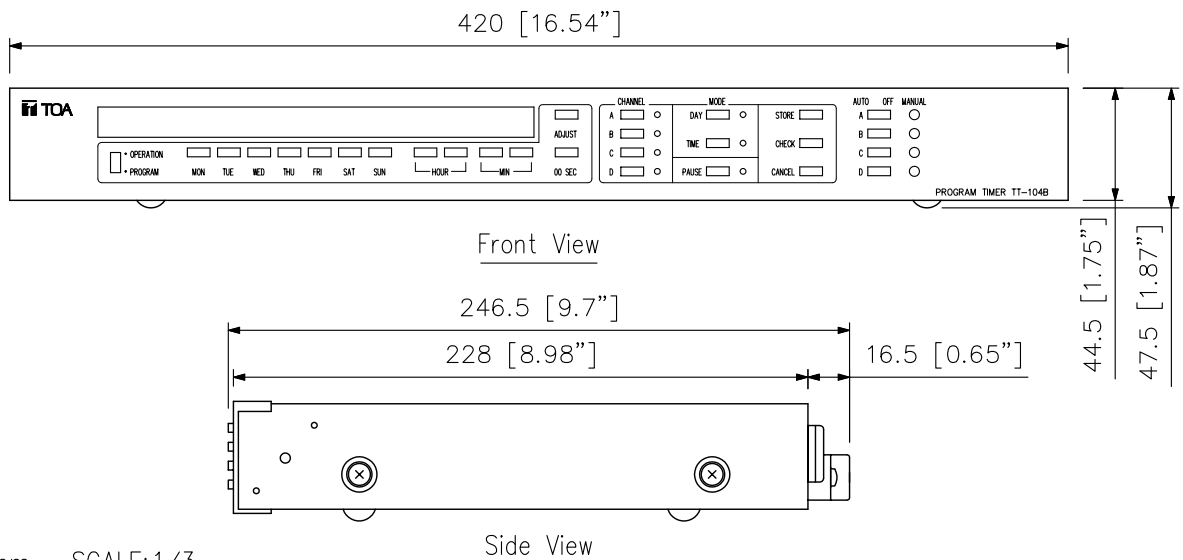

Front View

Side View

UNIT:mm SCALE:1/3